

MOBILITY MANAGEMENT IN SENSOR NETWORKS

Muneeb Ali

*Computer Science Department,
Lahore University of Management Sciences (LUMS),
Opposite Sector U, DHA, Lahore - 54792, Pakistan*
muneeb@sics.se

Thiemo Voigt

*Swedish Institute of Computer Science (SICS),
Box 1263, SE-164 29 Kista, Sweden*
thiemo@sics.se

Zartash Afzal Uzmi

*Computer Science Department,
Lahore University of Management Sciences (LUMS),
Opposite Sector U, DHA, Lahore - 54792, Pakistan*
zartash@lums.edu.pk

Abstract In sensor-nets the individual sensor nodes are generally assumed to be static. However, some recent applications of sensor-nets (e.g. in medical care and disaster response) make use of mobile sensor nodes, which poses some unique challenges to sensor-net systems researchers. In this paper we address the issue of mobility management from a sensor-net architecture point of view. While in current practice individual applications and protocols at different layers obtain, store and manage mobility information we propose to reduce this redundancy by storing mobility information in a logically centralized database that is visible across all layers.

Keywords: Wireless Sensor Networks, Mobility Management, Cross-layer Service

1. Introduction

Sensor networks have the potential to revolutionize medical care and disaster response amongst others. However, there is a significant gap

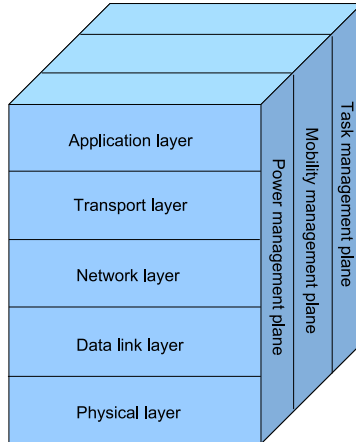


Figure 1. Traditional sensor-net conceptual protocol stack [3].

between the current sensor network technologies and the special needs of medical care - one of these is the need to handle mobility of nodes. The applications of sensor networks in medical care and disaster relief [1–2] call for re-thinking of protocol design as there is a need to better adapt the current protocols to mobility. The assumption of static sensor nodes, generally made in sensor-net research, is no longer valid in medical care (e.g. sensors attached to doctors or first responders). In this paper we address the issue of mobility management from a sensor-net architecture point of view and provide a framework for handling mobility. Our design is primarily motivated by medical care and disaster response applications of sensor-nets, but it is generic enough that it could be applied to any mobile sensor network.

The traditional (conceptual) network protocol stack for sensor networks [3] is given in Figure 1. However, unlike the Internet this protocol stack is not strictly enforced in most sensor networking architectures. There are no standardized layer boundaries and research groups have produced monolithic solutions that cut across the boundaries of different layers.

Culler et al. [4] argue that the lack of an overall sensor network architecture is the *primary factor* limiting research progress in sensor-nets because of reduced synergy between different research efforts. One of the early encouraging steps towards a sensor network architecture is the sensor-net protocol (SP) [5], a flexible alternative to the recent ZigBee standard. SP sits between the data-link and network layer and provides a standardized interface to medium access control (MAC), with some feedback in both directions. We consider SP as an important step in

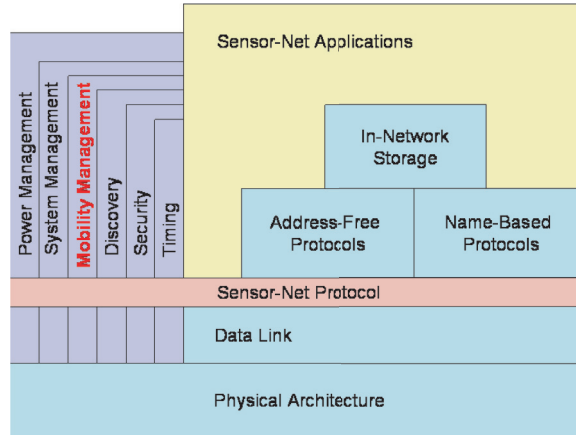


Figure 2. Sensor-net architecture [4] with cross-layer mobility-management service.

realizing a larger sensor-net architecture. Developing a sensor-net architecture would be a growing and organic process. In this paper we discuss the open issue of addressing mobility management in sensor-nets in the general context of moving towards a sensor-net architecture. We argue that there is a need to store mobility information into a database visible across all layers since in many scenarios, in particular in medical care and disaster response, both the application, network layer services and medium access control layer require mobility information. Currently these layers obtain, store and manage this information individually. The central database proposed in this paper enables sharing of this information across all layers leading to more efficient resource usage and potentially more precise mobility information.

We discuss related work in Section 2, present our mobility management framework in Section 3, discuss simulation and implementation issues in Section 4, and present conclusions and future work in Section 5.

2. Related Work

Internet solutions generally do not apply to sensor-nets, but their underlying techniques do. Our mobility-management framework is motivated by Snoeren et al.'s concept of cross-layer visibility as a service in the Internet [6].

The research community generally ignores mobility in sensor-nets because sensor-nets were originally assumed to consist of static nodes. However, recent efforts such as RoboMote [7] and Parasitic-Mobility [8] have enabled mobility in sensor-nets. Moreover, there has been an increased interest in medical care and disaster response appli-

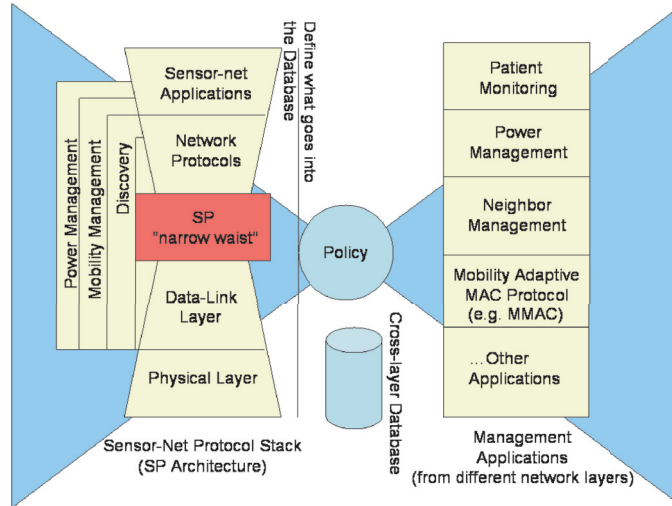


Figure 3. “Bow-tie” mobility-management architecture.

cations of sensor-nets, sometimes referred to as “body sensor networks”, and these environments make use of mobile sensor nodes e.g. sensors attached to doctors or first responders. AID-N [9], SMART [10], and CodeBlue [1–2] are amongst several projects targeting medical care using sensor-nets. We believe that research in the area of body sensor networks is at a relatively early stage with the main focus being on the development of hardware technologies that enable medical applications [11]. To the best of our knowledge CodeBlue [1–2] is the only initiative that has comprehensively addressed sensor-nets for medical care and proposed a software architecture. However, even the Code-Blue architecture does not explicitly address mobility and we are not aware of any work in the general sensor-net literature that presents a mobility-management architecture framework. SP’s unifying link abstraction [5] and the mobility-management cross-layer service presented in this paper could be integrated into the larger architecture of Code-Blue [2] to provide better mobility handling and to enable efforts from different research groups to inter-operate with each other.

3. Mobility-management Framework

We propose a “bow-tie” architecture (Figure 3) for providing cross-layer mobility information in the general sensor-net architecture. The left side of Figure 3 illustrates the sensor-net protocol stack with SP [5] as the “narrow waist”. SP provides a unifying link abstraction to the data

link layer and allows applications and network protocols running on top of SP to become independent of the underlying data link and physical radio technologies. The center of Figure 3 shows the cross-layer database that is populated from mobility information gathered by the left-side network protocol stack. The cross-layer database is implemented as a shared buffer and provides services to the management applications that form the right side of the bow-tie in Figure 3. The cross-layer mobility-information database is populated on-demand of the concerned architecture components. The information update depends on the *policy mechanism* and such information could either be updated in a “lazy” best-effort manner or the sensor node could actively request such information depending on the individual needs of the concerned applications.

The mobility information could be required by sensor-net medical care applications (e.g. monitoring physical movement of depression patients), network layer services (e.g. neighbor discovery and route maintenance), and medium access control layer (e.g. mobility-adaptive MAC [12]). Therefore, instead of exporting information between layers it is more useful to import mobility information into a separate management database visible across all layers. To allow solutions from different research groups to inter-operate we need to standardize what goes *into* the database. This allows network technologies and management applications to evolve independently over time while preserving the interface between them.

Our mobility-management design does not take any stance on time synchronization and can work with any underlying time synchronization mechanism e.g. [13] or [14]. Like SP [5] our mobility-management framework does not take any stance on naming, but assumes that accessible nodes have unique addresses. For details on naming issues see [15].

In the remainder of this section we first present the AR-1 mobility estimation model we intend to use in our architecture, then discuss location issues as well as the energy costs for local dissemination of mobility information.

3.1 Mobility Estimation

We intend to use the AR-1 model [16] for mobility estimation. The AR models are autoregressive models used for estimations. Zaidi and Mark have shown that these models can be used to estimate mobility in wireless networks [16]. In the AR-1 model the mobile node’s state, at time t , is defined by a column vector.

$$s_t = [x_t, \dot{x}_t, \vec{x}_t, y_t, \dot{y}_t, \vec{y}_t]', \quad (1)$$

where s_t is the mobility state, (x_t, y_t) specify position, \dot{x}_t and \dot{y}_t specify velocity, notation \prime specifies the matrix transpose operator, and \ddot{x}_t and \ddot{y}_t specify the acceleration in the x and y directions. The AR-1 model [16] gives,

$$s_{t+1} = As_t + \omega_t, \quad (2)$$

where A is a 6×6 transformation matrix, the vector ω_t is a 6×1 discrete-time zero mean, white Gaussian process with autocorrelation function $R_\omega(k) = \delta_k Q$, where $\delta_0 = 1$ and $\delta_k = 0$ when $k \neq 0$. The matrix Q is the covariance matrix of ω_t . The values for matrix A and the covariance matrix Q are estimated based on training data using the Yule-Walker equations [17]. See [16, 18] for details on mobility estimation.

The mobility state information \hat{s}_t , at a given time t can be used to predict the mobility state at any time $t+i$. The optimal predicted state \hat{s}_{t+i} of the mobile node in the minimum mean-square error (MMSE) sense is given by,

$$\hat{s}_{t+i} = A^i \hat{s}_t \quad (3)$$

More accurate mobility estimation could be obtained by using the AR-3 estimation model [19] instead of the AR-1 model, but we believe that using the computationally intensive AR-3 model on memory-constrained sensor nodes is not feasible from a practical point of view. However, the choice of the estimation model, and its effect on different performance metrics, remains an open area for future work.

3.2 Localization Issues

Accuracy of mobility estimation depends on the accuracy of the underlying localization mechanism. Localization is a well-studied problem in wireless sensor networks and it has been shown that many multi-hop localization algorithms provide quite accurate results in simulation [20–22]. Others are trying to bridge the gap between simulation and real world performance of localization algorithms [23]. Further, some effort is performed on localization for mobile sensor networks [24]. A detailed discussion of localization algorithms is beyond the scope of this paper.

3.3 Energy Costs

With advances in low-power computing chips, the wireless interface will be the *primary consumer* of energy in any device that combines computation and radios. Therefore, we primarily focus on communication energy costs while evaluating the energy costs of our mobility-management design. In the AR-1 model, *self mobility* can be estimated

without any communication. However, for the mobility information to be useful to applications (e.g. network layer topology management) any node would also need information on all neighbor nodes' mobility estimation. Every node could perform local processing and instead of sending out raw location values each node could transmit only the final locally-calculated predicted location information, but even such predicted future location would need to be communicated at *regular intervals*. Hence, there is a need of a cost-benefit evaluation to determine if it is worth expending energy on such mobility information.

4. Simulation and Implementation Discussion

Assumptions made in most simulation environments for wireless networks, e.g. a radio's transmission area is circular, all radios have equal range etc., do not necessarily reflect the real-world conditions [25]. In order to fully understand the complexity from a system perspective and to develop solutions that work in real life, it is necessary to not only model or simulate, but also to implement and test on real world systems.

We are currently implementing SP [5] and the mobility-management cross-layer service described in this paper in the Contiki [26] operating system using the Protothreads [27] library. From our prior experience we have found Protothreads to be extremely useful in reducing the complexity of event-based programming [27]. For simulations we are using the COOJA simulator [28] developed for the Contiki OS. Using the COOJA simulator and programming in standard C for simulations greatly reduces the time to map the code, written for our simulations, to real deployments running Contiki on Telos Motes [29]. Furthermore, for mobility evaluations we are implementing realistic mobility models [30] and are using comprehensive real mobility traces (collected by some research efforts [25, 31]) for our evaluations.

5. Conclusions and Future Work

The mobility-management framework presented is ongoing work and in this paper we have presented our design and provided relevant discussions for early information dissemination. We believe that SP [5] is an encouraging step towards a sensor-net architecture and that the sensor-nets community should make use of SP with mobility-management as a cross-layer service to provide a standardized yet flexible framework for future research in the area.

Acknowledgments

We thank Koen Langendoen for valuable feedback that helped to improve this paper.

References

- [1] K. Lorincz, D. Malan, T. R. F. Fulford-Jones, A. Nawoj, A. Clavel, V. Shnayder, G. Mainland, S. Moulton, and M. Welsh, "Sensor networks for emergency response: Challenges and opportunities," *IEEE Pervasive Computing, Special Issue on Pervasive Computing for First Response*, Oct-Dec 2004.
- [2] V. Shnayder, B. Chen, K. Lorincz, T. R. F. Fulford-Jones, and M. Welsh, "Sensor networks for medical care," Harvard University, Tech. Rep. TR-08-05, April 2005.
- [3] I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "A survey on sensor networks," *IEEE Communications Magazine*, vol. 40, no. 8, pp. 102–116, Aug. 2002.
- [4] D. Culler, P. Dutta, C. T. Ee, R. Fonseca, J. Hui, P. Levis, J. Polastre, S. Shenker, I. Stoica, G. Tolle, and J. Zhao, "Towards a sensor network architecture: Lowering the waistline," in *Proc. HotOS-X*, June 2005.
- [5] J. Polastre, J. Hui, P. Levis, J. Zhao, D. Culler, S. Shenker, and I. Stoica, "A unifying link abstraction for wireless sensor networks," in *Proc. ACM SenSys'05*, Nov. 2005.
- [6] R. R. Kompella, A. Greenberg, J. Rexford, A. C. Snoeren, and J. Yates, "Cross-layer visibility as a service," in *Proc. HotNets-IV*, College Park, Maryland, USA, Nov. 2005.
- [7] K. Dantu, M. Rahimi, H. Shah, S. Babel, A. Dhariwal, and G. S. Sukhatme, "Robomote: Enabling mobility in sensor networks," in *IEEE/ACM Fourth International Conference on Information Processing in Sensor Networks (IPSN/SPOTS)*, Apr. 2005.
- [8] M. Laibowitz and J. A. Paradiso, "Parasitic mobility for pervasive sensor networks," in *Third International Conference on Pervasive Computing (PERVASIVE 2005)*, Munich, Germany, May 2005.
- [9] "The advanced health and disaster aid network (AID-N)," <http://secwww.jhuapl.edu/aidn/>.
- [10] "Smart: Scalable medical alert and response technology," <http://smart.csail.mit.edu/>.
- [11] B. Lo and G. Z. Yang, "Key technical challenges and current implementations of body sensor networks," in *Proc. Workshop on Body Sensor Networks (BSN 2005)*, April 2005.
- [12] M. Ali, T. Suleman, and Z. A. Uzmi, "MMAC: A mobility-adaptive, collision-free mac protocol for wireless sensor networks," in *Proc. 24th IEEE IPCCC'05*, Phoenix, Arizona, USA, April 2005.
- [13] J. van Greunen and J. Rabaey, "Lightweight time synchronization for sensor networks," in *WSNA '03: Proceedings of the 2nd ACM international conference on Wireless sensor networks and applications*. ACM Press, 2003, pp. 11–19.

- [14] K. Römer and F. Mattern, "Towards a unified view on space and time in sensor networks," *Elsevier Computer Communications*, vol. 28, no. 13, pp. 1484–1497, aug 2005.
- [15] M. Ali and Z. A. Uzmi, "An energy-efficient node address naming scheme for wireless sensor networks," in *IEEE International Networking and Communications Conference (INCC'04)*, June 2004.
- [16] Z. R. Zaidi and B. L. Mark, "Mobility estimation for wireless networks based on an autoregressive model," in *Proc. IEEE Globecom 2004*, Dallas, Texas, Dec. 2004.
- [17] J. S. Lim and A. V. Oppenheim, *Advanced Topics in Signal Processing*. Englewood Cliffs, NJ 07632: Prentice Hall, 1987.
- [18] Z. R. Zaidi, B. L. Mark, and R. K. Thomas, "A two-tier representation of node mobility in ad hoc networks," in *Proc. IEEE SECON 2004*, Santa Clara, California, Oct. 2004.
- [19] R. Shibata, "Selection of the order of an autoregressive model by akaike's information criterion," *Biometrika*, vol. 63, no. 1, pp. 117–126, April 1976.
- [20] N. Bulusu, J. Heidemann, D. Estrin, and T. Tran, "Self-configuring localization systems: Design and experimental evaluation," *ACM Transactions on Embedded Computing Systems*, vol. 3, no. 1, pp. 24–60, February 2004.
- [21] T. He, C. Huang, B. M. Blum, J. A. Stankovic, and T. F. Abdelzaher, "Range-free localization and its impact on large scale sensor networks," *Trans. on Embedded Computing Sys.*, vol. 4, no. 4, pp. 877–906, 2005.
- [22] K. Lorincz and M. Welsh, "Motetrack: A robust, decentralized approach to rf-based location tracking," in *Workshop on Location and Context-Awareness (LoCA 2005) at Pervasive 2005*, Munich, Germany, May 2005.
- [23] K. Whitehouse, C. Karlof, A. Woo, F. Jiang, and D. Culler, "The effects of ranging noise on multihop localization: an empirical study," in *Fourth International Conference on Information Processing in Sensor Networks (IPSN '05)*, Los Angeles, California, Apr. 2005.
- [24] L. Hu and D. Evans, "Localization for mobile sensor networks," in *ACM MobiCom 2004*, Sept. 2004.
- [25] D. Kotz, C. Newport, R. S. Gray, J. Liu, Y. Yuan, and C. Elliott, "Experimental evaluation of wireless simulation assumptions," in *Proceedings of the ACM/IEEE International Symposium on Modeling, Analysis and Simulation of Wireless and Mobile Systems (MSWiM)*, October 2004, pp. 78–82.
- [26] A. Dunkels, B. Grönvall, and T. Voigt, "Contiki - a lightweight and flexible operating system for tiny networked sensors," in *Proc. EmNets-I, USA*, Nov. 2004.
- [27] A. Dunkels, O. Schmidt, and T. Voigt, "Using Protothreads for Sensor Node Programming," in *Proc. of the Workshop on Real-World Wireless Sensor Networks (REALWSN'05)*, Stockholm, Sweden, June 2005.
- [28] F. Österlind, "A sensor network simulator for the Contiki OS," Swedish Institute of Computer Science (SICS), Tech. Rep. T2006-05, February 2006.
- [29] J. Polastre, R. Szewczyk, and D. Culler, "Telos: Enabling ultra-low power wireless research," in *In Proc. IPSN/SPOTS'05*, Los Angeles, California, USA, April 2005.

- [30] T. Camp, J. Boleng, and V. Davies, “A survey of mobility models for ad hoc network research,” *Wireless Communication & Mobile Computing (WCMC), Special issue on Mobile Ad Hoc Networking: Research, Trends and Applications*, vol. 2, no. 5, pp. 483–502, 2002.
- [31] F. Bai, N. Sadagopan, and A. Helmy, “The IMPORTANT framework for analyzing the impact of mobility on performance of routing for ad hoc networks,” *AdHoc Networks Journal - Elsevier*, vol. 1, no. 4, pp. 383–403, Nov. 2003.